



Digital Model

- Asset Lifecycle
- Offshore · Subsea · Marine
- Automation: ASCII Data to Engineering Insights

CTV Access Operability — Kincardine

Month-by-month vessel/access suitability storyline
from SeaOps Solutions reference image ·
digitalmodel GTM material

17.8%

AS-BUILT ANNUAL
OPERABILITY

25.9%

WITH SOUTH
LANDING

+8.2 pp


ANNUAL UPLIFT

+46%

RELATIVE UPLIFT

Monthly operability uplift

Jan Feb Mar Apr May Jun Jul Aug Sep Oct Nov Dec

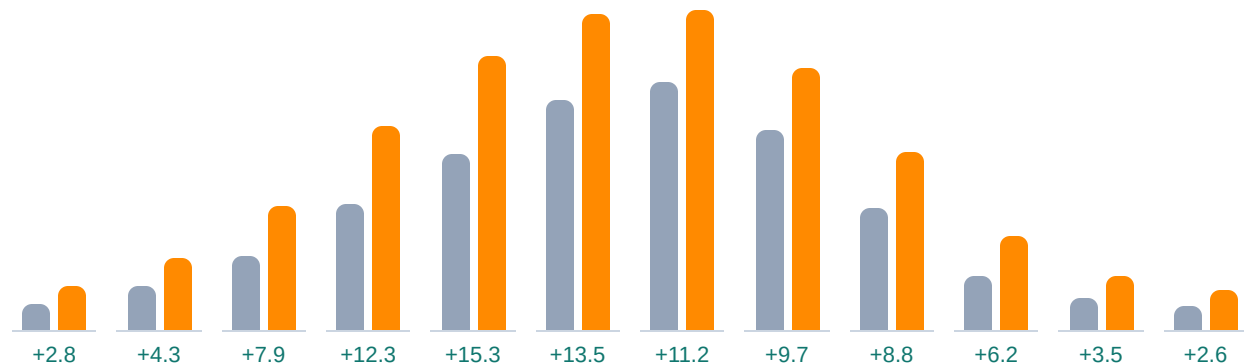

Legend: grey = as-built north landing [N] only; orange = [N] + [S] landing. Uplift values are percentage points.

Digitized monthly values

Month	[N] only	[N]+[S]	Uplift
Jan	4.0%	6.8%	+2.8 pp
Feb	7.0%	11.3%	+4.3 pp
Mar	11.6%	19.5%	+7.9 pp
Apr	19.7%	32.0%	+12.3 pp

Month	[N] only	[N]+[S]	Uplift
May	27.5%	42.8%	+15.3 pp
Jun	36.0%	49.5%	+13.5 pp
Jul	38.8%	50.0%	+11.2 pp
Aug	31.2%	40.9%	+9.7 pp
Sep	19.0%	27.8%	+8.8 pp
Oct	8.4%	14.6%	+6.2 pp
Nov	5.0%	8.5%	+3.5 pp
Dec	3.6%	6.2%	+2.6 pp

Caveat: monthly values are approximate digitizations from a user-provided SeaOps Solutions infographic and should not be used as design-basis metocean data. Preserve SeaOps attribution and confirm external reuse rights before public/prospect distribution. Source-stated basis: NORA3 at 56.95°N, 1.87°W, 1979–2025, daylight-only, $W_s \leq 12$ m/s, $t \geq 4$ h daylight.

GTM implication

A vessel suitability conversation should not stop at crane capacity or pipelay equipment. Access direction, weather windows, and real-time measured motion can materially change practical operability and client schedule risk.