

# Month-by-month CTV operability

## as-built [N] only vs [N] + [S]

NORA3 56.95°N 1.87°W · 1979–2025 · 411,264 hours · daylight-only ·  $W_s \leq 12$  m/s ·  $t \geq 4$  h daylight

AS-BUILT [N] · ANNUAL

**17.8%**

of hours operable today

**Arrangement**

WITH [S] LANDING · ANNUAL

**25.9%**

+8.2 pp vs as-built

ANNUAL UPLIFT (RELATIVE)


**+46%**

operability lifts ~half-again

PEAK ABS · MAY

**+15.3 pp**

28% → 43%

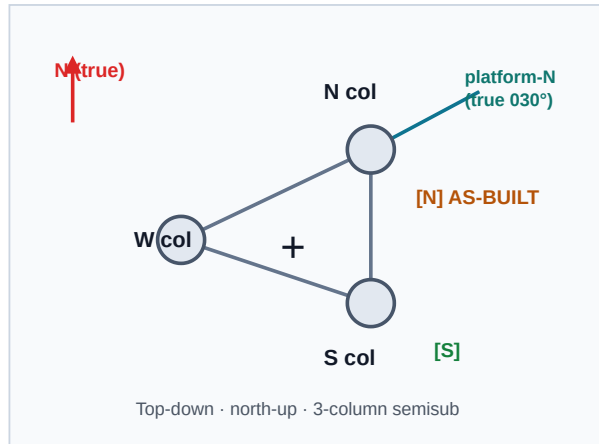

### What the data says

- **Adding [S] lifts annual operability ~46%**

As-built [N] alone: 17.8%; with [S] added: 25.9% (+8.2 pp).

- **Summer peak in May**

As-built 28% → with [S] 43% (+15.3 pp).  
Apr–Aug all clear +9 pp uplift.

- **Winter is daylight-bound**

Jan 6.8% · Dec 6.2% even with [S]. At 57°N the must-complete-in-daylight rule structurally caps Dec/Jan/Feb.

### Operable hours per month — climatology

